


**Fluorescent Frame-In Kits**  
**171 mm Aperture**  
**1 Light 26/32W Triple Tube**

**Lytecaster®**  
**Recessed**  
**Downlighting**

**1100FTEX**  
**FOR EXPORT ONLY**      **0698**

TYPE:

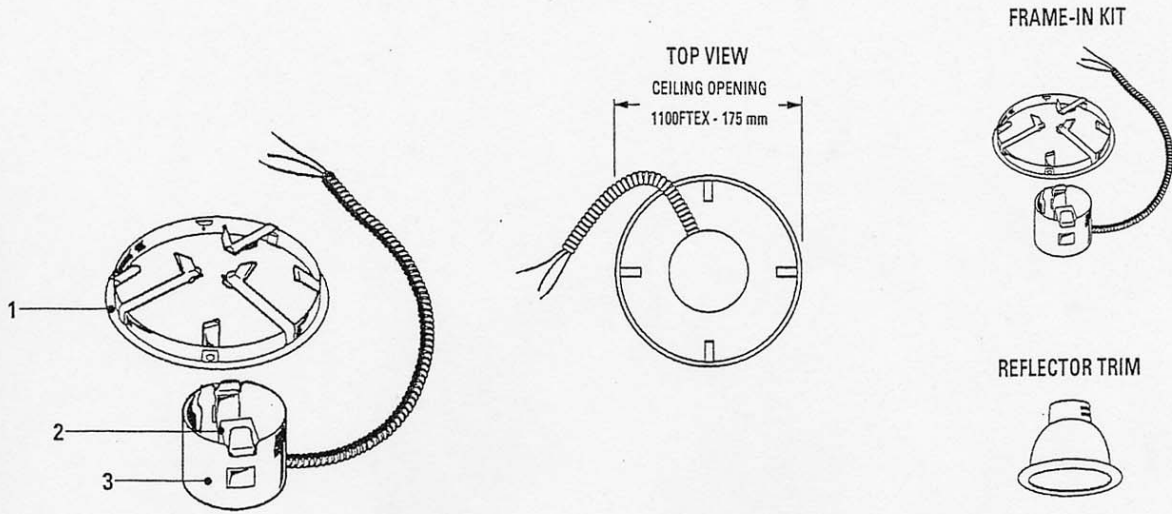

**Complete Fixture consists of REFLECTOR TRIM & FRAME-IN KIT. Select each separately.**

Frame-In Kit	Lamp	Reflector Trims – See Individual Reflector Trim Specification Sheet							
		Open Downlight						Enclosed Diffuser	Wall Washer
		Alzak Reflector	Alzak Cone	Satin Cone	Baffles	Basic White	Cross Blade		
<input type="checkbox"/> 1100FTEX	26W Triple Tube	<input type="checkbox"/> 1143 <input type="checkbox"/> 1144 <input type="checkbox"/> 1145 <input type="checkbox"/> 1146	<input type="checkbox"/> 1112 <input type="checkbox"/> 1113 <input type="checkbox"/> 1113BK <input type="checkbox"/> 1113WH	<input type="checkbox"/> 1108 <input type="checkbox"/> 1110	<input type="checkbox"/> 1105 <input type="checkbox"/> 1105WH <input type="checkbox"/> 1175 <input type="checkbox"/> 1176 <input type="checkbox"/> 1176WH <input type="checkbox"/> 1179M1 <input type="checkbox"/> 1179WH	<input type="checkbox"/> 1170M1 <input type="checkbox"/> 1171	<input type="checkbox"/> 1132*	<input type="checkbox"/> 1121 <input type="checkbox"/> 1124 <input type="checkbox"/> 1126* <input type="checkbox"/> 1128* <input type="checkbox"/> 1134 <input type="checkbox"/> 1177SH <input type="checkbox"/> 1178SH	<input type="checkbox"/> 1185 <input type="checkbox"/> 1186 <input type="checkbox"/> 1186WH
	32W Triple Tube								

\*32W GE and Osram/Sylvania may not physically fit.

**Features**

- Mounting Ring:** .032 (#22 ga.) galvanized steel. Accommodates existing ceilings up to 51 mm thick. Attaches securely to any type of ceiling material without tools using (3) mounting straps provided. Push-in/Twist-out clips hold reflector flush to ceiling. Includes adhesive backed aperture template.
- Socket:** Four-pin base (Gx24q-3), molded thermoplastic. Prewired with No. 18 AWM leads.
- Socket Housing:** Steel precisely attached to reflector by spring clip.

**Options & Accessories**

Replacement Clips (Set of 3):      1997

WE RESERVE THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS AND FINISH IN ANY WAY.

LIGHTOLIER a GENLYTE company.  
 631 Airport Road, Fall River, MA 02720  
 (508) 679-8131 • Fax (508) 674-4710

© Copyright 1998

**LIGHTOLIER**